## (19) World Intellectual Property **Organization**

International Bureau





(43) International Publication Date 13 January 2005 (13.01.2005)

**PCT** 

## (10) International Publication Number WO 2005/003007 A1

(51) International Patent Classification7: 29/20

B65H 29/12,

(21) International Application Number:

PCT/SE2004/001061

(22) International Filing Date: 30 June 2004 (30.06.2004)

(25) Filing Language:

Swedish

(26) Publication Language:


English

(30) Priority Data: 0301942-9

1 July 2003 (01.07.2003)

- (71) Applicant (for all designated States except US): PLOCK-MATIC INTERNATIONAL AB [SE/SE]; Box 10025, S-121 26 Stockholm (SE).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW. GH. GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

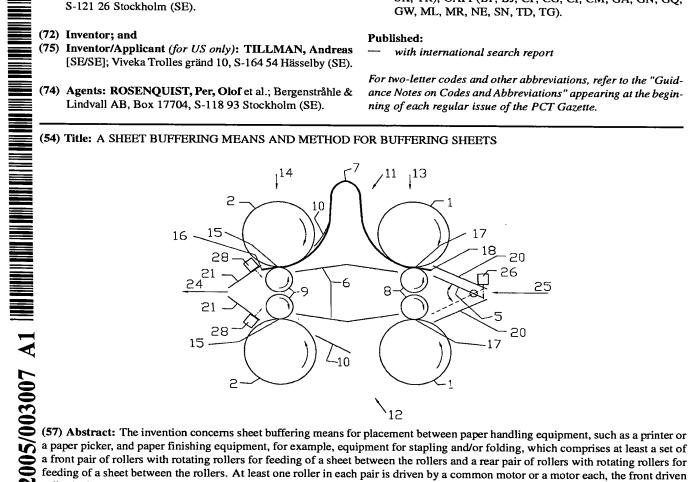

a front pair of rollers with rotating rollers for feeding of a sheet between the rollers and a rear pair of rollers with rotating rollers for feeding of a sheet between the rollers. At least one roller in each pair is driven by a common motor or a motor each, the front driven roller is disengageable by means of a clutch for holding a lead end of a sheet at the same time as the rear driven roller is driven so that the sheet becomes bent between the two pairs of rollers. The rear pair of rollers is stopped when the trail end of the sheet reaches the rear pair of rollers, whereby the sheet may sustain bent until it is desirable to feed it out, which is achieved by starting both of the pairs of rollers. The invention also concerns a method of buffering sheets.

